

Description

The DZMANTU-020B080 digital servo drive is designed to drive brushed and brushless servomotors, stepper motors, and AC induction motors from a compact form factor ideal for embedded applications. This fully digital drive operates in torque, velocity, or position mode and employs Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, this drive features dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

DZMANTU-020B080 drives feature an Ethernet interface for network communication and USB connectivity for drive commissioning using DriveWare® 7, available for download at www.a-m-c.com.

Click&Move® motion control and automation programs can be executed using this DZ Series drive. Click&Move is available for download and purchase at www.a-m-c.com.

All drive and motor parameters are stored in non-volatile memory. User variables in a Click&Move embedded project can also be stored in non-volatile memory.

Power Range

| | |
|--------------------|-------------------------------|
| Peak Current | 20 A (14.1 A _{RMS}) |
| Continuous Current | 10 A (10 A _{RMS}) |
| Supply Voltage | 18 - 80 VDC |



Features

- ▲ Four Quadrant Regenerative Operation
- ▲ Fully Digital State-of-the-art Design
- ▲ Programmable Gain Settings
- ▲ Fully Configurable Current, Voltage, Velocity and Position Limits
- ▲ PIDF Velocity Loop
- ▲ PID + FF Position Loop
- ▲ Compact Size, High Power Density
- ▲ 12-bit Analog to Digital Hardware
- ▲ On-the-Fly Mode Switching
- ▲ On-the-Fly Gain Set Switching
- ▲ Space Vector Modulation (SVM) Technology
- ▲ Dedicated Safe Torque Off (STO) Inputs

MODES OF OPERATION

- Current
- Velocity
- Position

COMMAND SOURCE

- Embedded Click&Move® Program
- ±10 V Analog
- Encoder Following

COMPLIANCES & AGENCY APPROVALS

- UL
- cUL
- CE Class A (LVD)
- CE Class A (EMC)
- TÜV Rheinland® (STO)
- RoHS


FEEDBACK SUPPORTED (FIRMWARE DEPENDENT)

- Halls
- Incremental Encoder
- Auxiliary Incremental Encoder
- 1Vp-p Sine/Cosine Encoder
- Absolute Encoder (EnDat® 2.1, Hiperface®, or BiSS C-Mode)
- ±10 VDC Position
- Tachometer (±10 VDC)





INPUTS/OUTPUTS

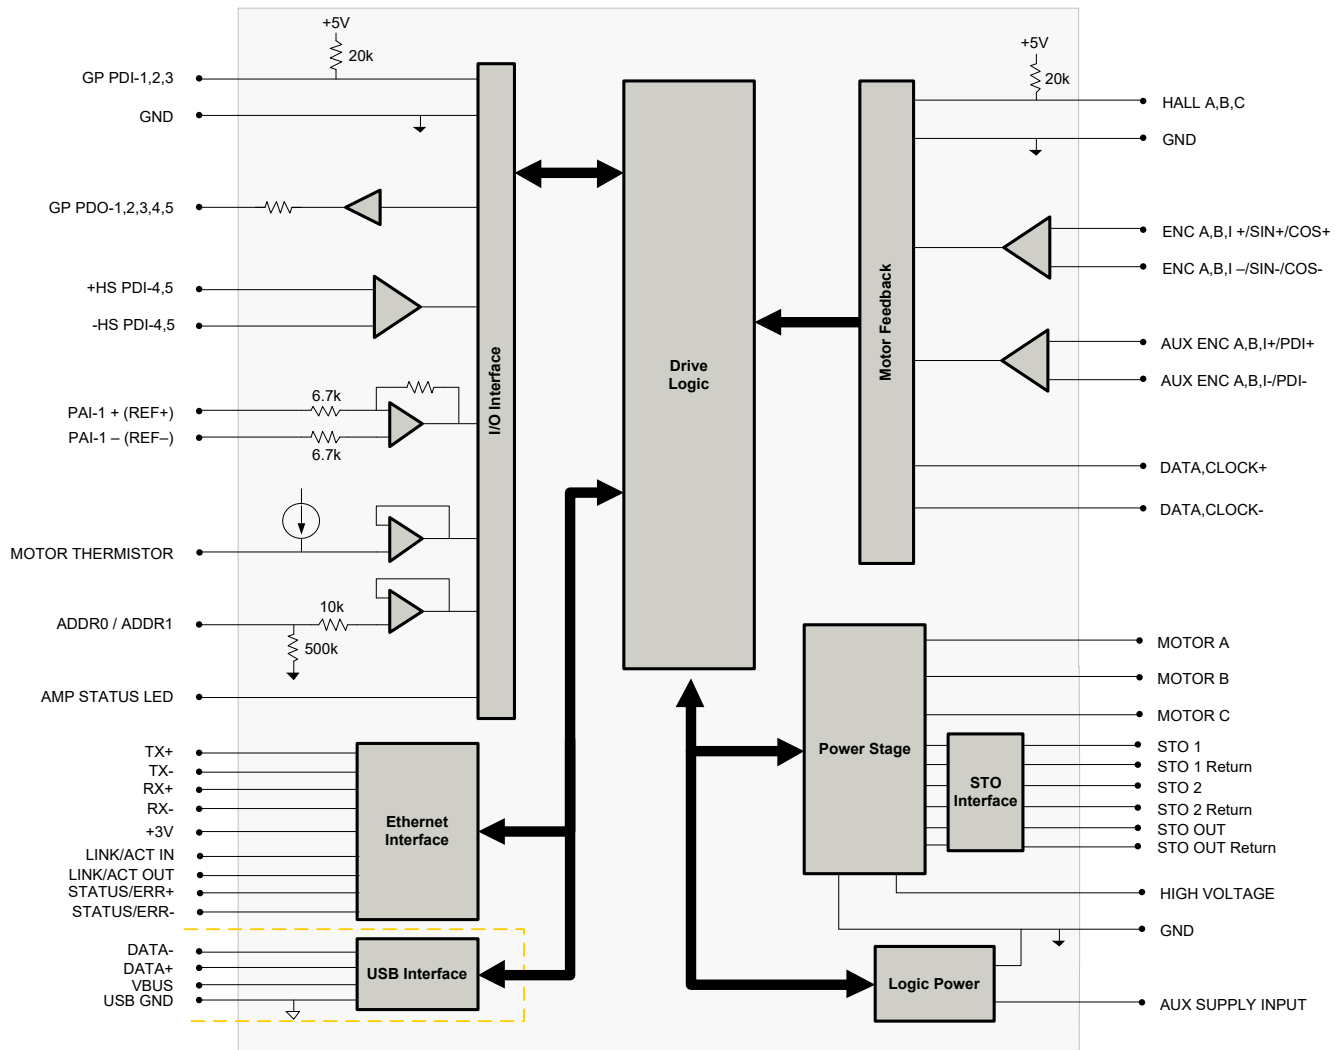- 1 Programmable Analog Input (12-bit Resolution)
- 5 Programmable Digital Inputs (Differential)
- 3 Programmable Digital Inputs (Single-Ended)
- 5 Programmable Digital Outputs (Single-Ended)
- 3 High Speed Captures

BLOCK DIAGRAM



Information on Approvals and Compliances

| | |
|---|--|
|  | <p>US and Canadian safety compliance with UL 508c, the industrial standard for power conversion electronics. UL registered under file number E140173. Note that machine components compliant with UL are considered UL registered as opposed to UL listed as would be the case for commercial products.</p> |
|  | <p>Compliant with European EMC Directive 2014/30/EU on Electromagnetic Compatibility (specifically EN 61000-6-4:2007/A1:2011 for Emissions, Class A and EN 61000-6-2:2005 for Immunity, Performance Criteria A). LVD requirements of Directive 2014/35/EU (specifically, EN 60204-1:2006/A1:2009, a Low Voltage Directive to protect users from electrical shock).</p> |
|  | <p>The RoHS Directive restricts the use of certain substances including lead, mercury, cadmium, hexavalent chromium and halogenated flame retardants PBB and PBDE in electronic equipment.</p> |
|  | <p>Functional Safety STO is TÜV Rheinland® certified and meets requirements of the following standards:</p> <ul style="list-style-type: none"> • EN ISO 13849-1 Category 4 / PL e • EN IEC 61800-5-2 STO (SIL 3) • EN62061 SIL CL3 • IEC 61508 SIL 3 |

SPECIFICATIONS

| Power Specifications | | |
|---|----------|---|
| Description | Units | Value |
| DC Supply Voltage Range | VDC | 18 - 80 |
| DC Bus Over Voltage Limit | VDC | 89 |
| DC Bus Under Voltage Limit | VDC | 16 |
| Logic Supply Voltage | VDC | 18 - 80 |
| Safe Torque Off Voltage (Nominal) | VDC | 5 (operating active range, 2.5V to 15V) |
| Maximum Peak Output Current ¹ | A (Arms) | 20 (14.1) |
| Maximum Continuous Output Current ² | A (Arms) | 10 (10) |
| Maximum Continuous Output Power | W | 760 |
| Maximum Power Dissipation at Continuous Current | W | 40 |
| Internal Bus Capacitance ³ | µF | 33 |
| Minimum Load Inductance (Line-To-Line) ⁴ | µH | 250 (at 80 V supply); 150 (at 48 V supply); 75 (at 24 V supply) |
| Switching Frequency | kHz | 20 |
| Maximum Output PWM Duty Cycle | % | 85 |
| Control Specifications | | |
| Description | Units | Value |
| Communication Interfaces | - | Modbus TCP / Ethernet (USB for Configuration) |
| Command Sources | - | Embedded Click&Move® Program, ±10 V Analog, Encoder Following |
| Feedback Supported (Firmware Dependent) | - | Auxiliary Incremental Encoder, Halls, Incremental Encoder, 1Vp-p Sine/Cosine Encoder, Absolute Encoder (EnDat® 2.1, Hiperface®, or BiSS C-Mode), ±10 VDC Position, Tachometer (±10 VDC) |
| Commutation Methods | - | Sinusoidal, Trapezoidal |
| Modes of Operation | - | Current, Velocity, Position |
| Motors Supported ⁵ | - | Three Phase (Brushless Servo), Single Phase (Brushed Servo, Voice Coil, Inductive Load), Stepper (2- or 3-Phase Closed Loop), AC Induction (Closed Loop Vector) |
| Hardware Protection | - | 40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage |
| Programmable Digital Inputs/Outputs (PDIs/PDOs) | - | 8/5 |
| Programmable Analog Inputs/Outputs (PAIs/PAOs) | - | 1/0 |
| Primary I/O Logic Level | - | 5V TTL |
| Current Loop Sample Time | µs | 50 |
| Velocity Loop Sample Time | µs | 100 |
| Position Loop Sample Time | µs | 100 |
| Maximum Encoder Frequency | MHz | 20 (5 pre-quadrature) |
| Mechanical Specifications | | |
| Description | Units | Value |
| Agency Approvals | - | CE Class A (EMC), CE Class A (LVD), cUL, TÜV Rheinland® (STO), RoHS, UL |
| Size (H x W x D) | mm (in) | 88.9 x 63.5 x 20.1 (3.5 x 2.5 x 0.8) |
| Weight | g (oz) | 126.8 (4.47) |
| Baseplate Operating Temperature Range ⁶ | °C (°F) | 0 - 75 (32 - 167) |
| Storage Temperature Range | °C (°F) | -20 - 85 (-4 - 185) |
| Relative Humidity | - | 0 - 90% non-condensing |
| Altitude | m (ft) | 0 - 4000 (0 - 13123) |
| Cooling System | - | Natural Convection |
| Form Factor | - | PCB Mounted |
| P1 Connector | - | 96-pin, 1.27 mm spaced, dual-row header |
| P2 Connector | - | 58-pin, 2.0 mm spaced, dual-row header |

Notes

1. Capable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with lower current limits.
2. Continuous A_{rms} value attainable when RMS Charge-Based Limiting is used.
3. Additional 100 µF / 100 V external bus capacitor between High Voltage and Power Ground as close to the drive as possible required.
4. Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.
5. Maximum motor speed for stepper motors is 600 RPM. Consult the hardware installation manual for 2-phase stepper wiring configuration.
6. Additional cooling and/or heatsink may be required to achieve rated performance.

PIN FUNCTIONS

| P1 - Signal Connector | | | | P1 - Signal Connector | | | | | |
|-----------------------|-------------------|---|------|-----------------------|-------------------|---|--------|--------|-----|
| Pin | Name | Description / Notes | I/O | Pin | Name | Description / Notes | I/O | | |
| 1 | RESERVED | Reserved. Do not connect. | - | 2 | RESERVED | Reserved. Do not connect. | - | | |
| 3 | PAI-1- | Differential Programmable Analog Input or Reference Signal Input (12-bit Resolution) | I | 4 | ADDR1 | Node Address Selector. See Pin Details below. | I | | |
| 5 | PAI-1+ | | I | 6 | ADDR0 | | I | | |
| 7 | GROUND | Ground | GND | 8 | GROUND | Ground | GND | | |
| 9 | MOT ENC B- / COS- | Primary Incremental Encoder or Cos Input from feedback device (Absolute or Sin/Cos 1Vp-p). Leave open for BiSS and EnDat 2.2. | I | 10 | MOT ENC A- / SIN- | Primary Incremental Encoder or Sin Input from feedback device (Absolute or Sin/Cos 1Vp-p). Leave open for BiSS and EnDat 2.2. | I | | |
| 11 | MOT ENC B+ / COS+ | | I | 12 | MOT ENC A+ / SIN+ | | I | | |
| 13 | GROUND | Ground | GND | 14 | +5V OUT | +5V User Supply (current between P1-14 and P1-29 must not exceed 250 mA) | O | | |
| 15 | MOTOR THERMISTOR | Motor Thermistor Input | I | 16 | GROUND | Ground | GND | | |
| 17 | MOT ENC CLK- | Serial Interface (RS485) for absolute feedback device (BiSS: MA-/+)) | I/O | 18 | MOT ENC_DATA- | Serial Interface (RS485) for absolute feedback device (BiSS: SLO-/+)) | I/O | | |
| 19 | MOT ENC CLK+ | | I/O | 20 | MOT ENC_DATA+ | | I/O | | |
| 21 | MOT ENC I- | Differential Incremental Encoder Channel I. Leave open for BiSS and EnDat 2.2. | I | 22 | AUX ENC B- | Auxiliary Incremental Encoder Channel B or Differential Programmable Digital Input 7 | I | | |
| 23 | MOT ENC I+ | | I | 24 | AUX ENC B+ | | I | | |
| 25 | AUX ENC I- | Auxiliary Incremental Encoder Channel I or Differential Programmable Digital Input 8 | I | 26 | AUX ENC A- | Auxiliary Incremental Encoder Channel A or Differential Programmable Digital Input 6 | I | | |
| 27 | AUX ENC I+ | | I | 28 | AUX ENC A+ | | I | | |
| 29 | +5V OUT | +5V User Supply (current between P1-14 and P1-29 must not exceed 250 mA) | O | 30 | HALL B | Single-ended Commutation Sensor Inputs | I | | |
| 31 | HALL C | Single-ended Commutation Sensor Inputs | I | 32 | HALL A | | I | | |
| 33 | PDI-5- | Differential Programmable Digital Input (High Speed Capture) | I | 34 | PDI-4- | Differential Programmable Digital Input (High Speed Capture) | I | | |
| 35 | PDI-5+ | | I | 36 | PDI-4+ | | I | | |
| 37 | GP PDO-5 | Programmable Digital Output | O | 38 | GP PDI-3 | Programmable Digital Input (High Speed Capture) | I | | |
| 39 | GP PDO-4 | Programmable Digital Output | O | 40 | GP PDI-2 | Programmable Digital Input | I | | |
| 41 | GP PDO-3 | Programmable Digital Output | O | 42 | GP PDI-1 | Programmable Digital Input | I | | |
| 43 | GP PDO-2 | Programmable Digital Output | O | 44 | AMP STATUS LED- | AMP Status LED Output for Bi-Color LED. See Pin Details below. | O | | |
| 45 | GP PDO-1 | Programmable Digital Output | O | 46 | AMP STATUS LED+ | | O | | |
| 47 | RESERVED | Reserved. Do not connect. | - | 48 | RESERVED | Reserved. Do not connect. | - | | |
| 49 | +5V USB | USB Supply | I | 50 | DATA- USB | USB Data Channel | I/O | | |
| 51 | GND USB | USB Ground | UGND | 52 | DATA+ USB | | I/O | | |
| 53 | GROUND | Ground | GND | 54 | GROUND | Ground | GND | | |
| 55 | RESERVED | Reserved. Do not connect. | - | 56 | | | - | | |
| 57 | RESERVED | Reserved. Do not connect. | - | 58 | | | - | | |
| 59 | GROUND | Ground | GND | 60 | RESERVED | Reserved. Do not connect. | - | | |
| 61 | | | - | 62 | | | - | | |
| 63 | RESERVED | Reserved. Do not connect. | - | 64 | | | - | | |
| 65 | | | - | 66 | | | - | | |
| 67 | GROUND | Ground | GND | 68 | | | GROUND | Ground | GND |
| 69 | | | - | 70 | | | | | - |
| 71 | | | - | 72 | | | - | | |
| 73 | RESERVED | Reserved. Do not connect. | - | 74 | RESERVED | Reserved. Do not connect. | - | | |
| 75 | | | - | 76 | | | - | | |
| 77 | | | - | 78 | | | - | | |
| 79 | GROUND | Ground | GND | 80 | GROUND | Ground | GND | | |
| 81 | TX- OUT | Transmit Line OUT (100 Base TX) | O | 82 | RX- OUT | Receive Line OUT (100 Base TX) | O | | |
| 83 | TX+ OUT | Transmit Line OUT (100 Base TX) | O | 84 | RX+ OUT | Receive Line OUT (100 Base TX) | O | | |
| 85 | +3V OUT | +3V Supply for Transformer/Magnetics Bias | O | 86 | +3V OUT | +3V Supply for Transformer/Magnetics Bias | O | | |
| 87 | TX- IN | Transmit Line IN (100 Base TX) | I | 88 | RX- IN | Receive Line IN (100 Base TX) | I | | |
| 89 | TX+ IN | Transmit Line IN (100 Base TX) | I | 90 | RX+ IN | Receive Line IN (100 Base TX) | I | | |
| 91 | GROUND | Ground | GND | 92 | GROUND | Ground | GND | | |
| 93 | RESERVED | Reserved. Do not connect. | - | 94 | LINK/ACT OUT | Link and Activity Indicator for OUT port. Function based on protocol specification. See Pin Details below. | I/O | | |
| 95 | RESERVED | | - | 96 | LINK/ACT IN | Link and Activity Indicator for IN port. Function based on protocol specification. See Pin Details below. | I/O | | |

| P2 - Power Connector | | | |
|----------------------|------------------|---|---------|
| Pin | Name | Description / Notes | I/O |
| SAFE1 | STO OUT RETURN | Safe Torque Off Output Return | STORETO |
| SAFE2 | STO OUTPUT | Safe Torque Off Output | O |
| SAFE3 | STO-2 RETURN | Safe Torque Off 2 Return | STORET2 |
| SAFE4 | STO-2 | Safe Torque Off – Input 2 | I |
| SAFE5 | STO-1 RETURN | Safe Torque Off 1 Return | STORET1 |
| SAFE6 | STO-1 | Safe Torque Off – Input 1 | I |
| SAFE7 | NC | Not Connected | - |
| SAFE8 | NC | Not Connected | - |
| 1 | AUX SUPPLY INPUT | Auxiliary Supply Input for Logic backup (Optional) | I |
| 2 | AUX SUPPLY INPUT | | I |
| 3-10 | HIGH VOLTAGE | DC Power Input. Additional 100µF / 100V external bus capacitor required between HV and Ground. | I |
| 11 | NC | Not Connected | - |
| 12 | NC | Not Connected | - |
| 13-20 | GROUND | Ground connection for input power | GND |
| 21 | NC | Not Connected | - |
| 22 | NC | Not Connected | - |
| 23-30 | MOTOR A | Motor Phase A. Current output distributed equally across 8 pins per motor phase, 3A continuous current carrying capacity per pin. | O |
| 31 | NC | Not Connected | - |
| 32 | NC | Not Connected | - |
| 33-40 | MOTOR B | Motor Phase B. Current output distributed equally across 8 pins per motor phase, 3A continuous current carrying capacity per pin. | O |
| 41 | NC | Not Connected | - |
| 42 | NC | Not Connected | - |
| 43-50 | MOTOR C | Motor Phase C. Current output distributed equally across 8 pins per motor phase, 3A continuous current carrying capacity per pin. | O |

Pin Details

ADDR0 (P1-6); ADDR1 (P1-4)

ADDR0, as well as *ADDR1*, are used to set the last octet of the IP Address of the drive within the Ethernet network. The value is set by applying a fixed voltage to the *ADDR0* and *ADDR1* pins. *ADDR0* sets the lower 4 bits of the address, and *ADDR1* sets the upper 4 bits of the address. The values for *ADDR0* and *ADDR1* are always integer multiples of 1/5 V within the range 0-3 V. Examples of the voltages required to set certain node ID's are given in the table below.

| ADDR1 Voltage (Volts) | ADDR1 Value (Hex) | ADDR0 Voltage (Volts) | ADDR0 Value (Hex) | Node ID (Decimal) |
|-----------------------|-------------------|-----------------------|-------------------|------------------------------|
| 0 | 0 | 0 | 0 | Address stored in NVM |
| 0 | 0 | 0.2 | 1 | 001 |
| 0 | 0 | 0.4 | 2 | 002 |
| ... | ... | ... | ... | ... |
| 3 | F | 2.6 | D | 253 |
| 3 | F | 2.8 | E | 254 |
| 3 | F | 3 | F | 255 |

AMP STATUS LED+ (P1-46); AMP STATUS LED- (P1-44)


AMP STATUS LED+/- provide power bridge status outputs that can be used with either a single Bi-Directional LED or two Uni-Directional LEDs, depending on the user configuration (reference the Hardware Installation Manual for the recommended wiring diagram, available for download at www.a-m-c.com). Status LED output functionality is as follows:

| AMP STATUS LED+/- Functionality | |
|---------------------------------|--|
| Drive State | Pin Output State |
| Power Bridge Enabled | AMP STATUS LED- = High; AMP STATUS LED+ = LOW |
| Power Bridge Disabled (Fault) | AMP STATUS LED + = HIGH; AMP STATUS LED- = LOW |
| No Power Applied to Drive | AMP STATUS LED +/- = LOW |

LINK/ACT IN (P1-96); LINK/ACT OUT (P1-94); STATUS/ERR+/- (P1-93/95)

The *LINK/ACT IN*, *LINK/ACT OUT*, and *STATUS/ERR* pins serve as Ethernet network indicators. On a standard RJ-45 connector used with Ethernet network topology, the typical Ethernet network indicator LED locations is shown in the below diagram. **Note**

that the drive features signals for connection to LEDs on an RJ-45 connector, but the connector itself is not included on the drive. The MC1XDZPE01 Mounting Card features a built-in RJ-45 connector with LEDs for this purpose.

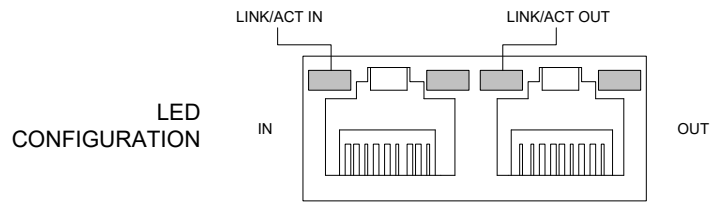

LINK/ACT IN and *LINK/ACT OUT* are used to drive the corresponding LINK IN and LINK OUT LEDs on a typical RJ-45 connector. (reference the Hardware Installation Manual for the recommended wiring diagram, available for download at www.a-m-c.com). The LED Function Protocol tables below describe typical LED functionality.

Communication LEDs Function Protocol

| LINK/ACT LEDES | |
|--------------------|-------------------------------|
| LED State | Description |
| Green – On | Valid Link - No Activity |
| Green – Flickering | Valid Link - Network Activity |
| Off | Invalid Link |


Safe Torque Off (STO) Inputs (P2-SAFE1 to P2-SAFE8)

The Safe Torque Off (STO) Inputs are dedicated +5VDC sinking single-ended inputs.

MECHANICAL INFORMATION


P1 - Signal Connector

| | | |
|-----------------------|--|---|
| Connector Information | 96-pin, 1.27mm spaced, dual-row header | |
| Mating Connector | Details | Samtec: CLP-148-02-F-D-BE-A-K (bottom entry); FLE-148-01-G-DV-A-K (top entry) |
| | Included with Drive | No |

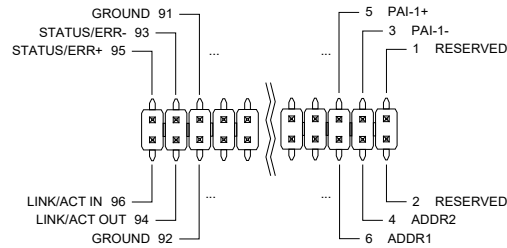


P2 - Power Connector


| | | |
|-----------------------|---------------------------------------|---|
| Connector Information | 58-pin, 2.0mm spaced, dual-row header | |
| Mating Connector | Details | Samtec: CLT-129-02-F-D-BE-A-K (bottom entry); TLE-129-01-G-DV-A-K (top entry) |
| | Included with Drive | No |

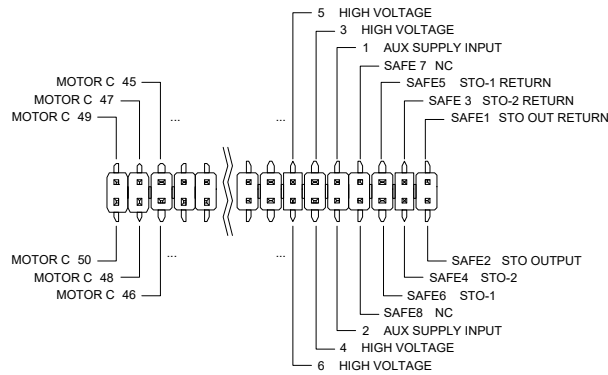

MOUNTING DIMENSIONS

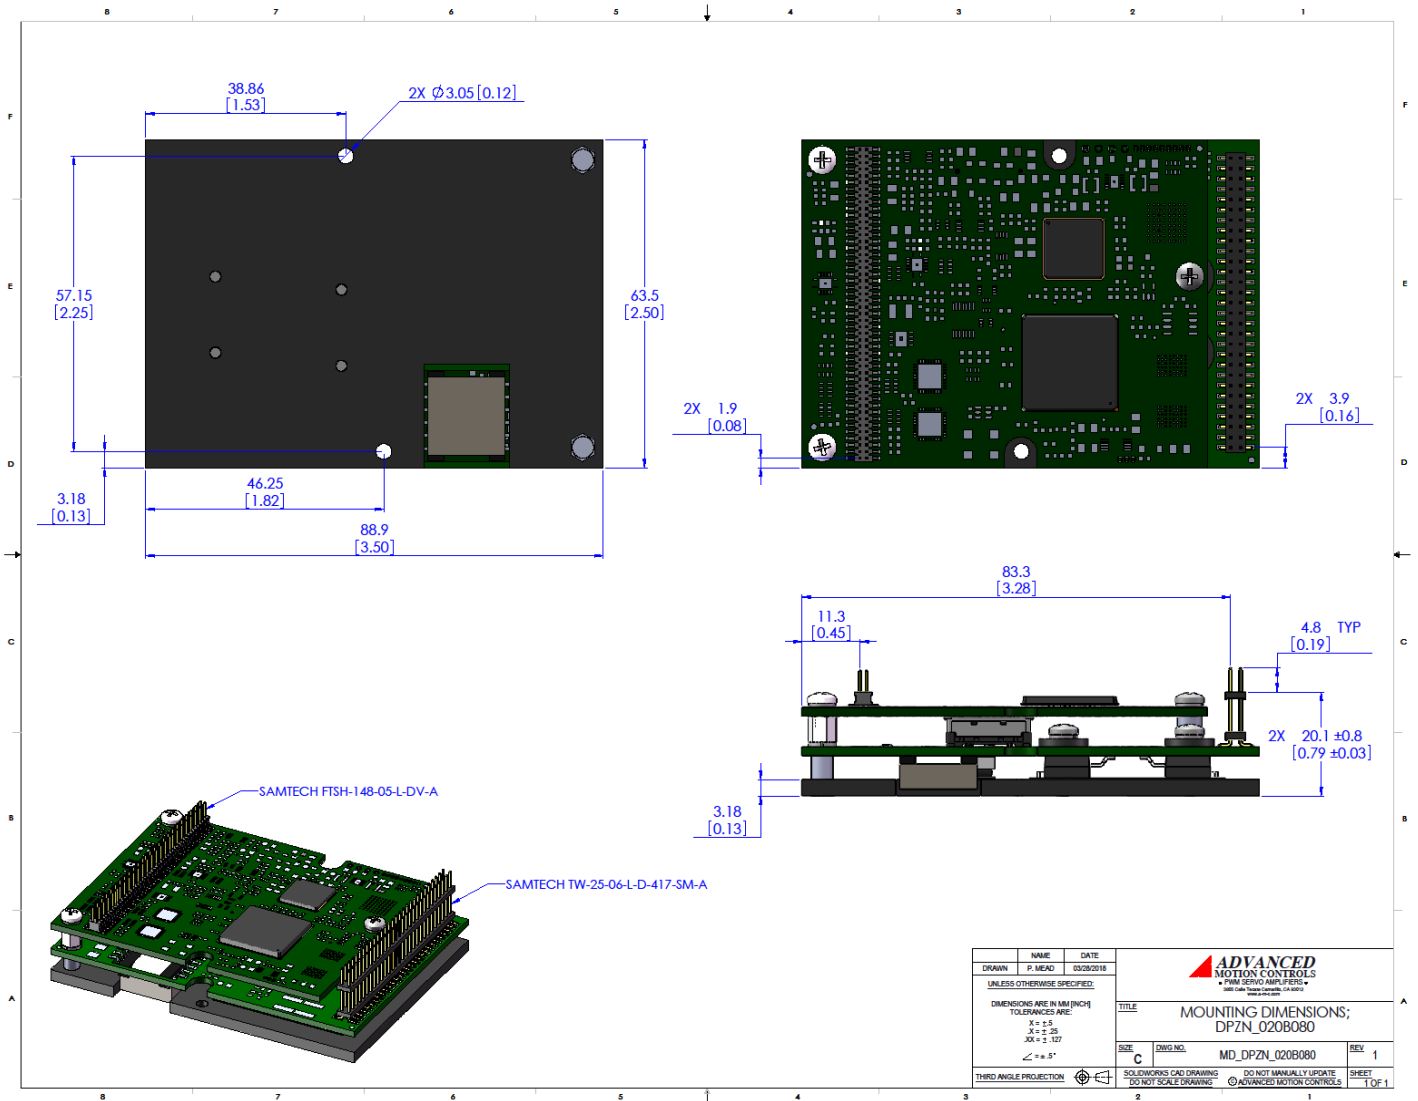

PART NUMBERING INFORMATION

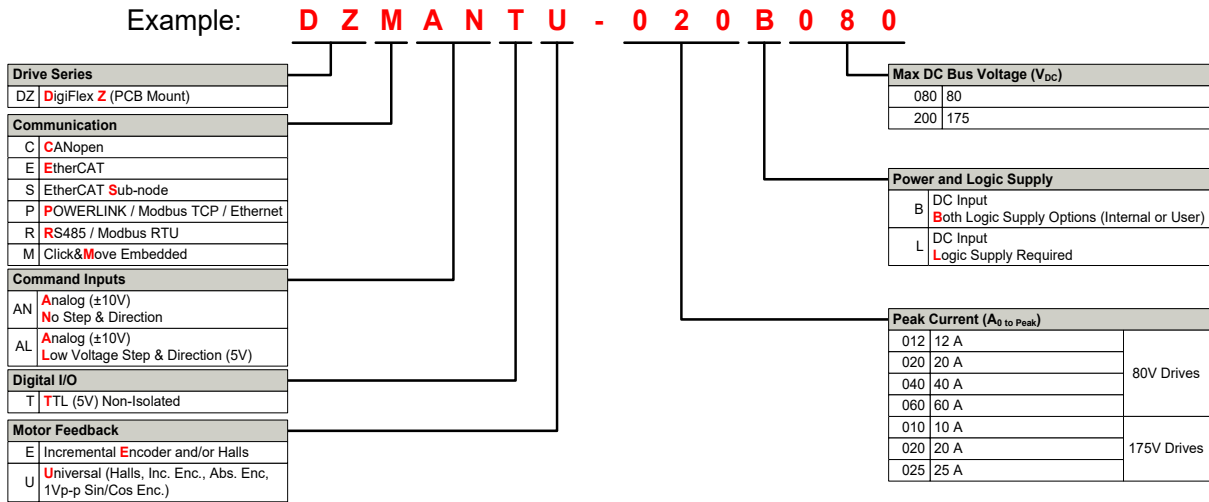

DigiFlex® Performance™ series of products are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability.

Examples of Customized Products

- ▲ Optimized Footprint
- ▲ Private Label Software
- ▲ OEM Specified Connectors
- ▲ No Outer Case
- ▲ Increased Current Resolution
- ▲ Increased Temperature Range
- ▲ Custom Control Interface
- ▲ Integrated System I/O
- ▲ Tailored Project File
- ▲ Silkscreen Branding
- ▲ Optimized Base Plate
- ▲ Increased Current Limits
- ▲ Increased Voltage Range
- ▲ Conformal Coating
- ▲ Multi-Axis Configurations
- ▲ Reduced Profile Size and Weight

Feel free to contact Applications Engineering for further information and details.

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.



All specifications in this document are subject to change without written notice. Actual product may differ from pictures provided in this document.